



1/10

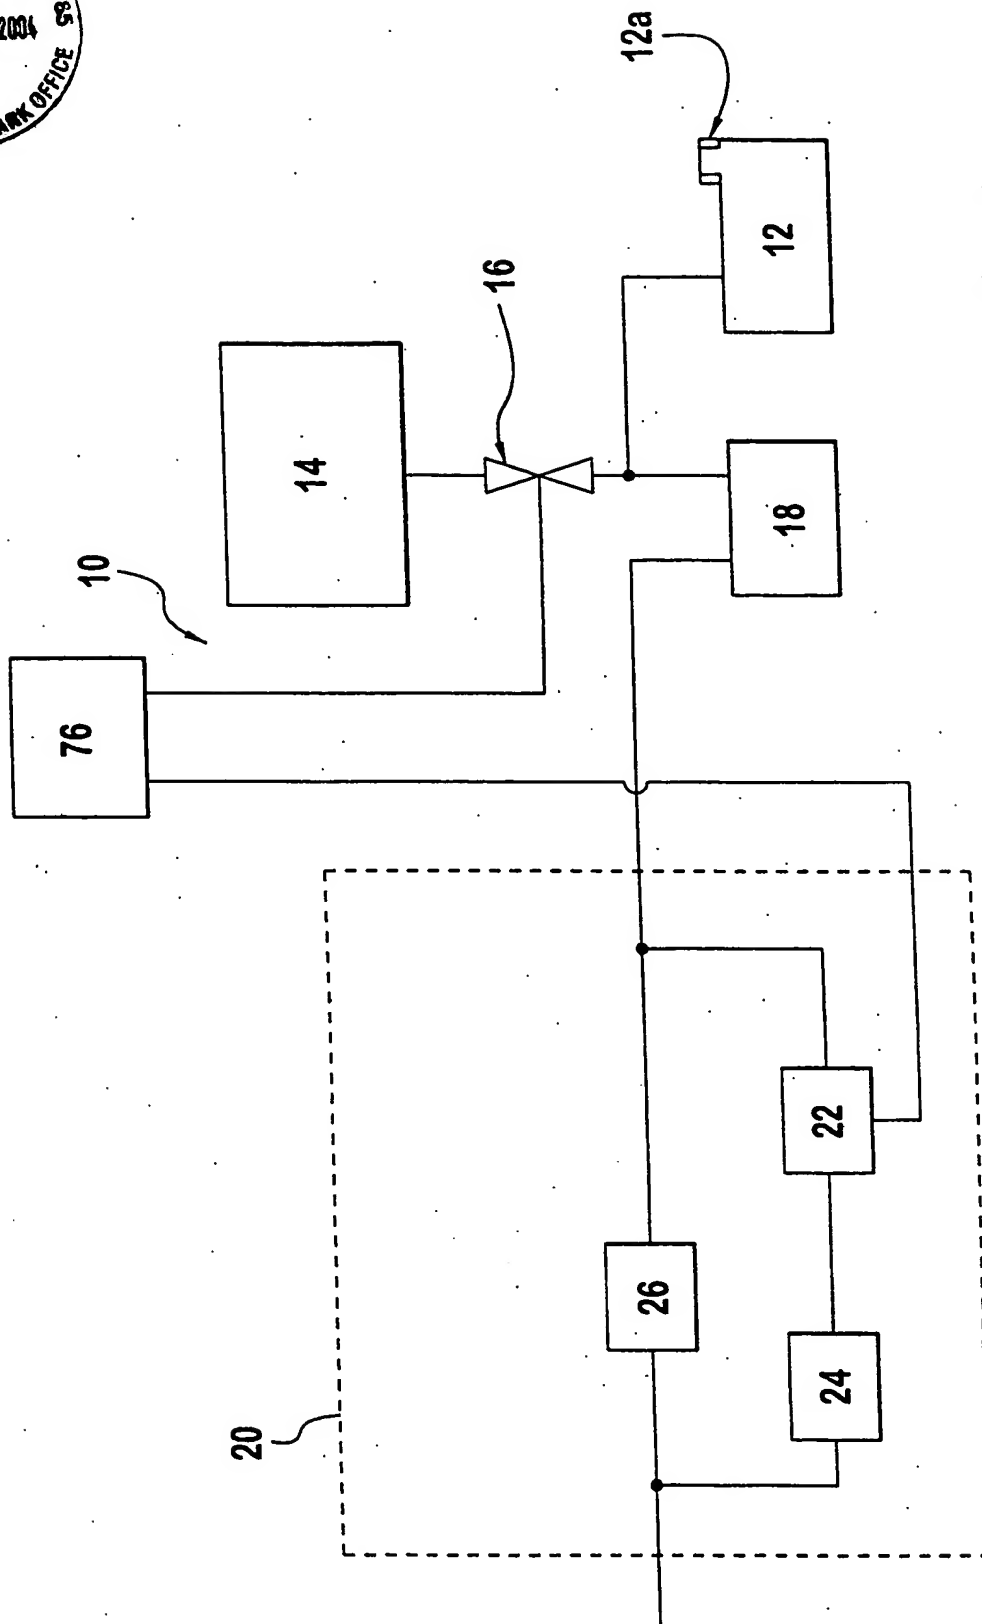


FIG. 1




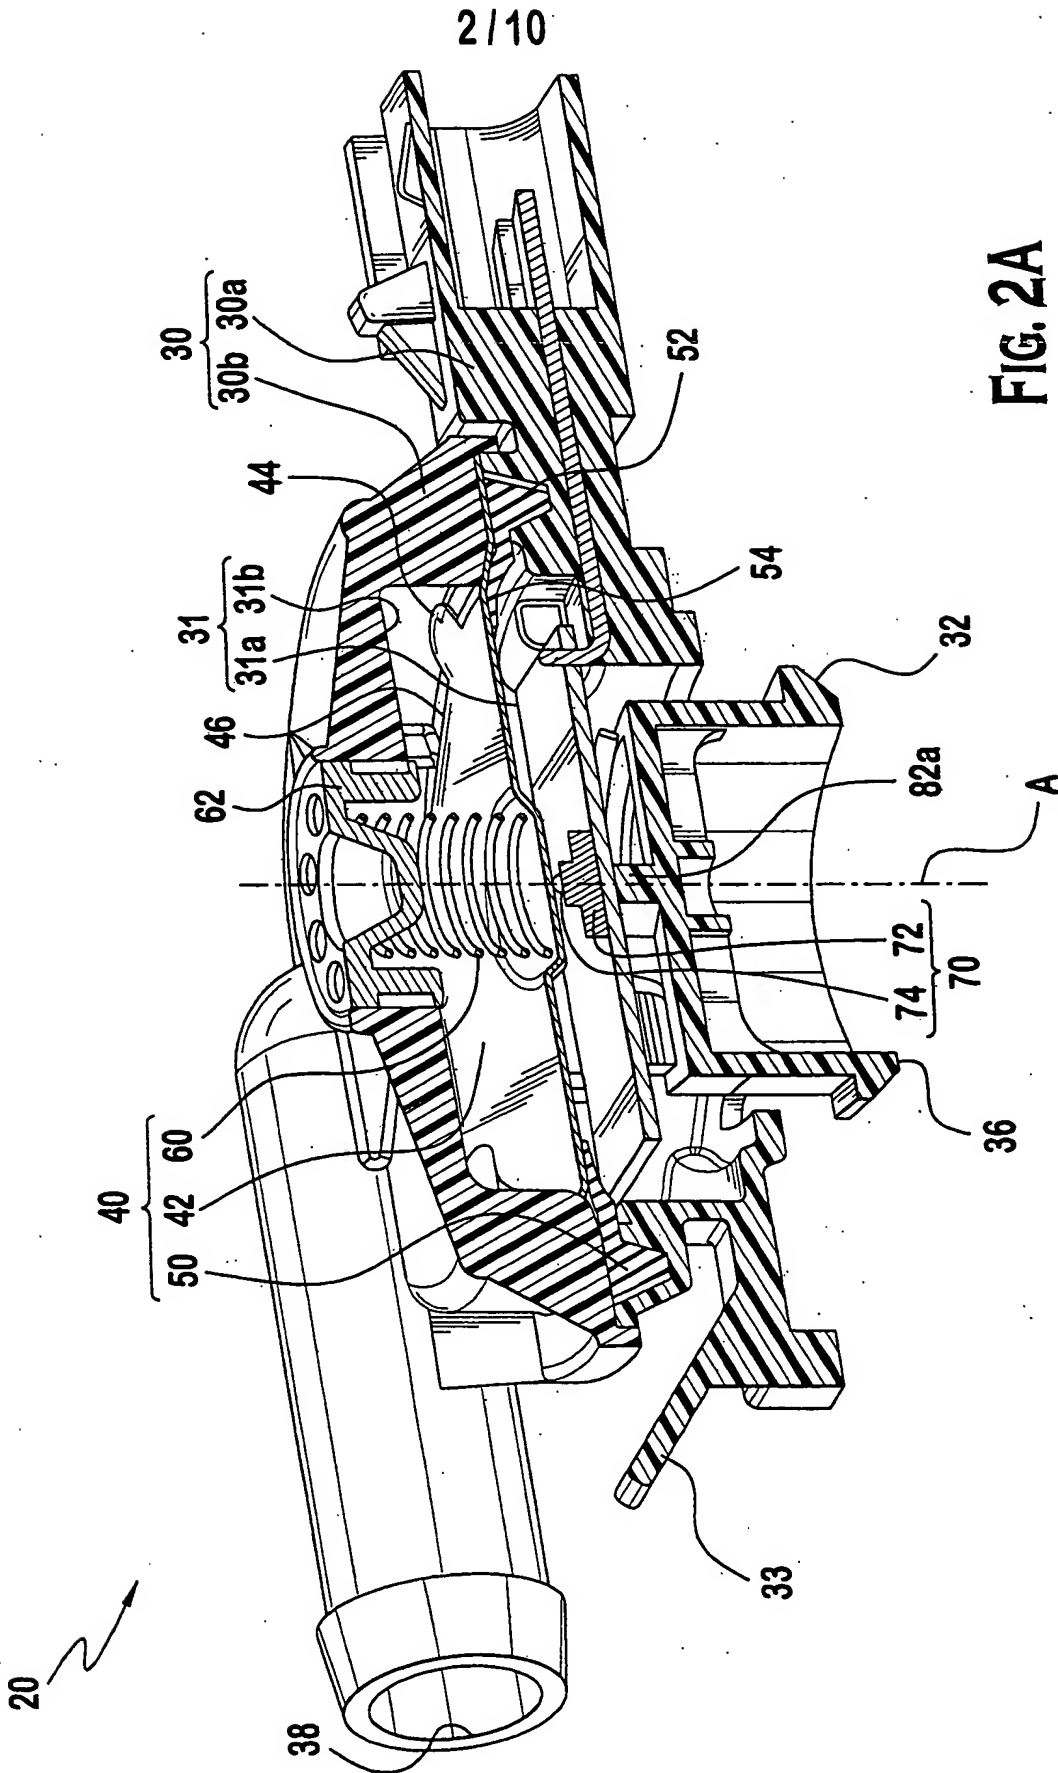


FIG. 2A

FIG. 2B

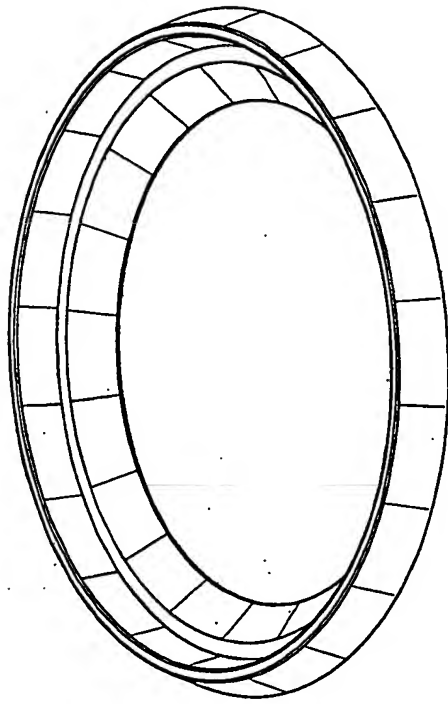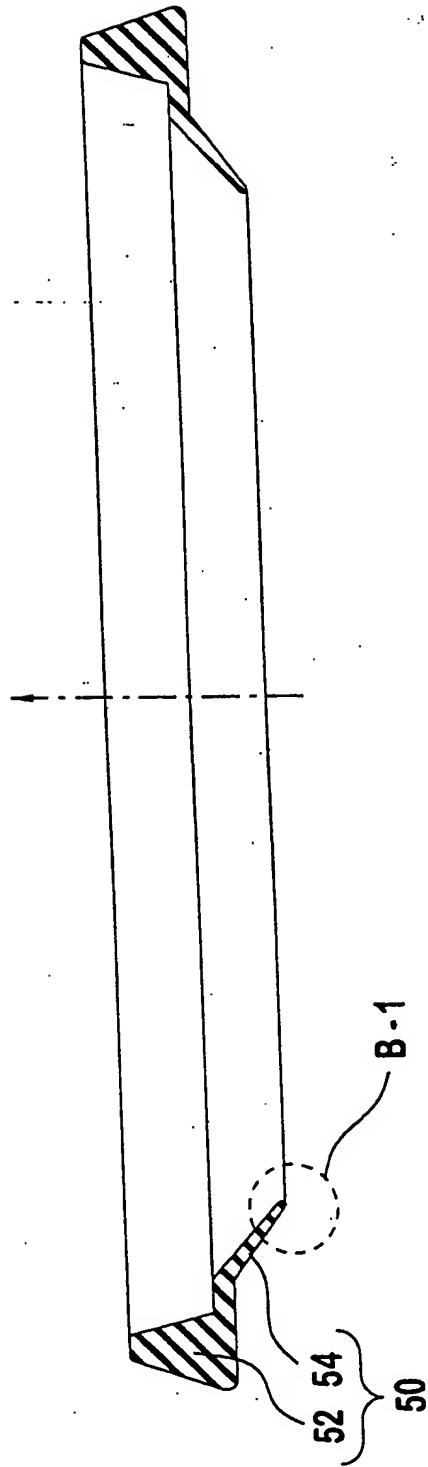

DETAIL B-1



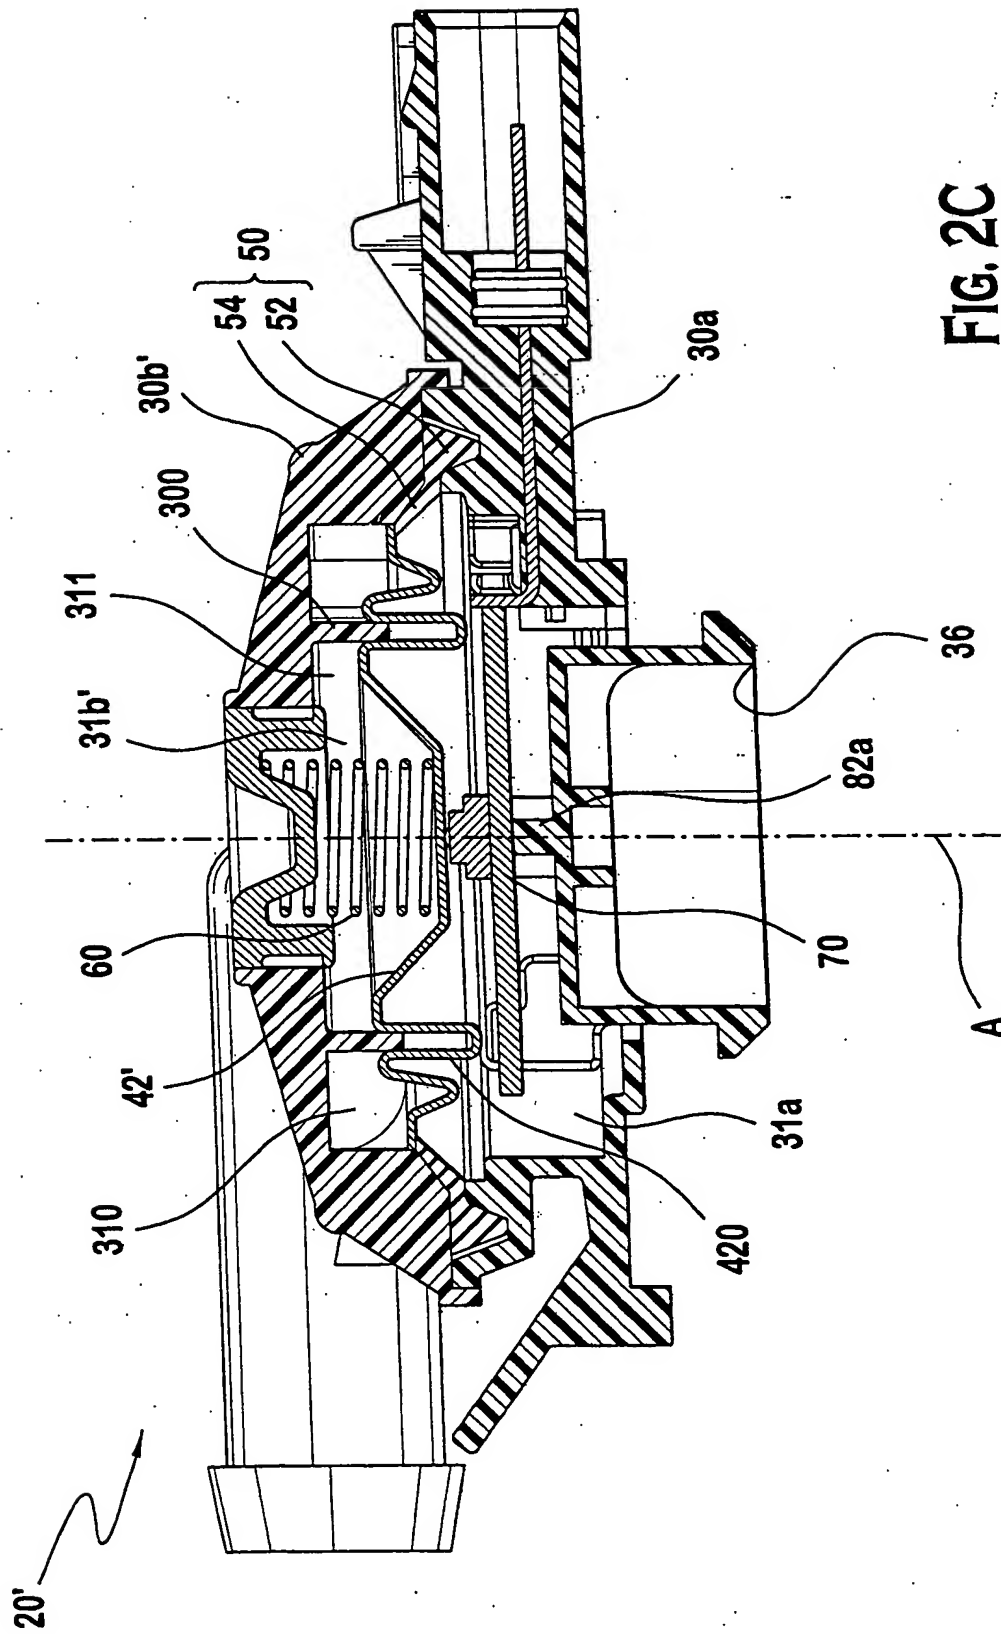


FIG. 2C

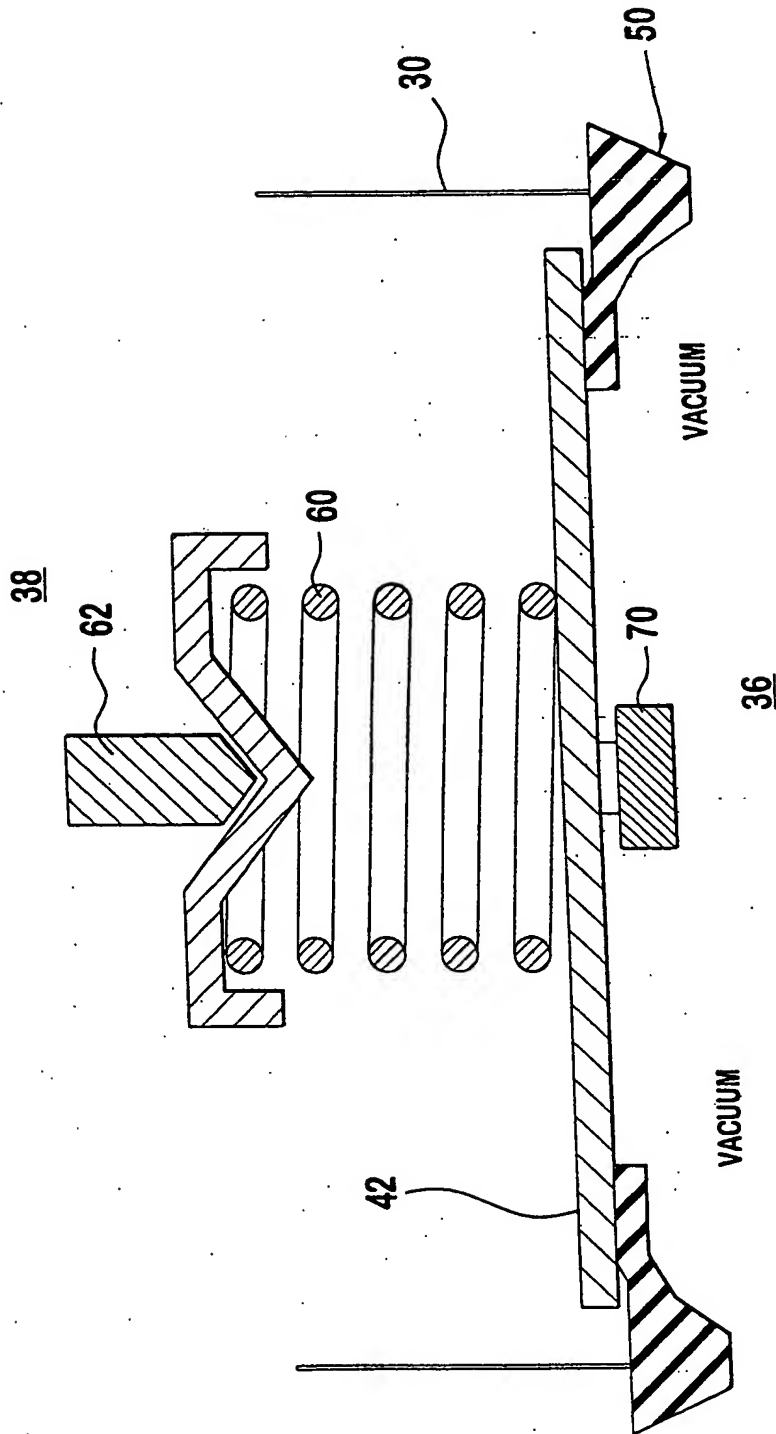


FIG. 3A

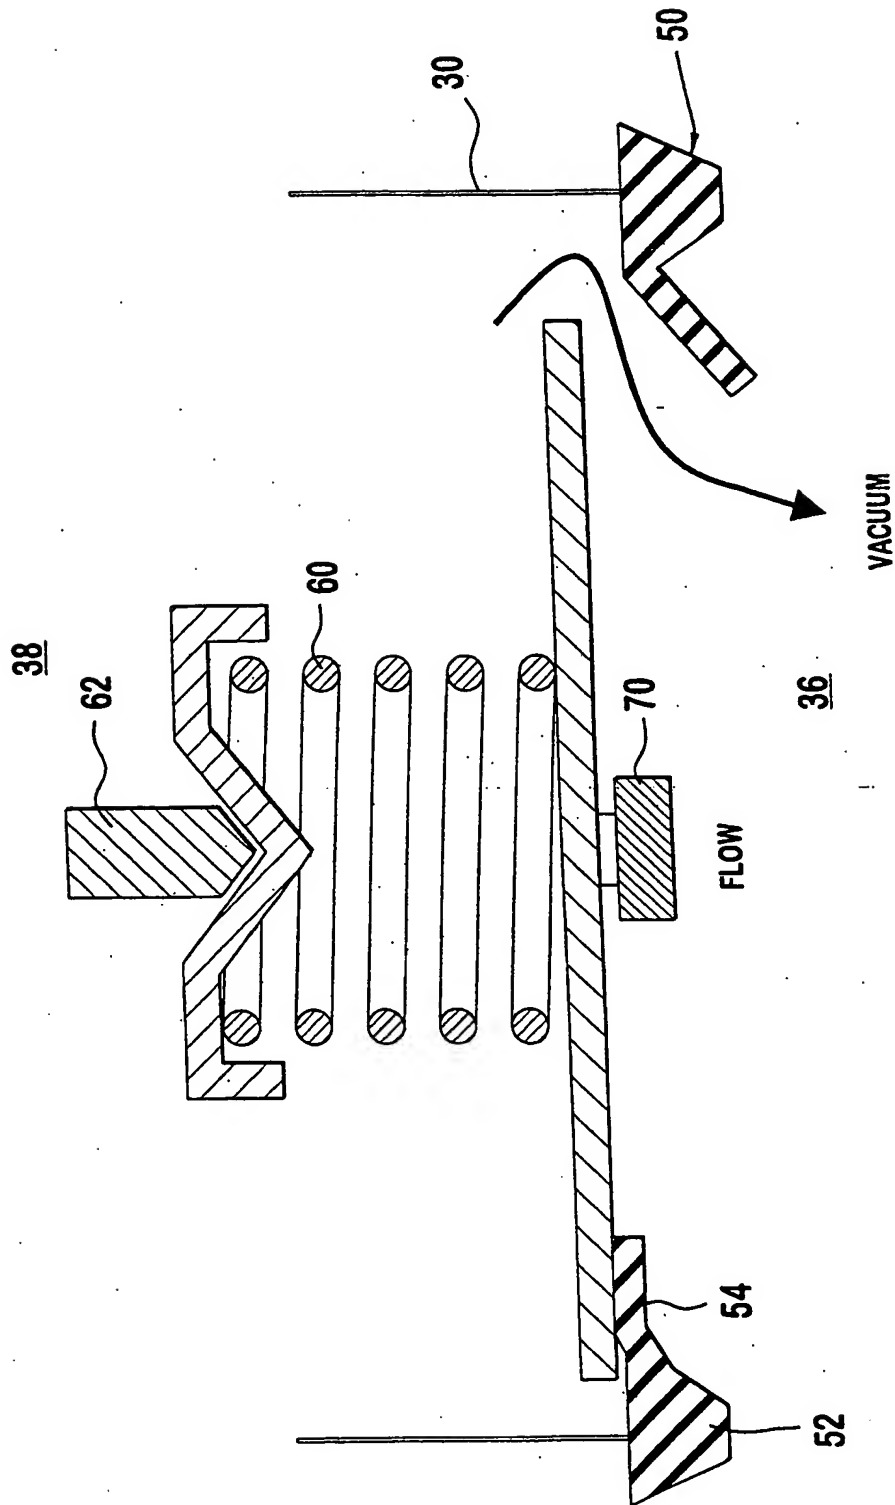


FIG. 3B

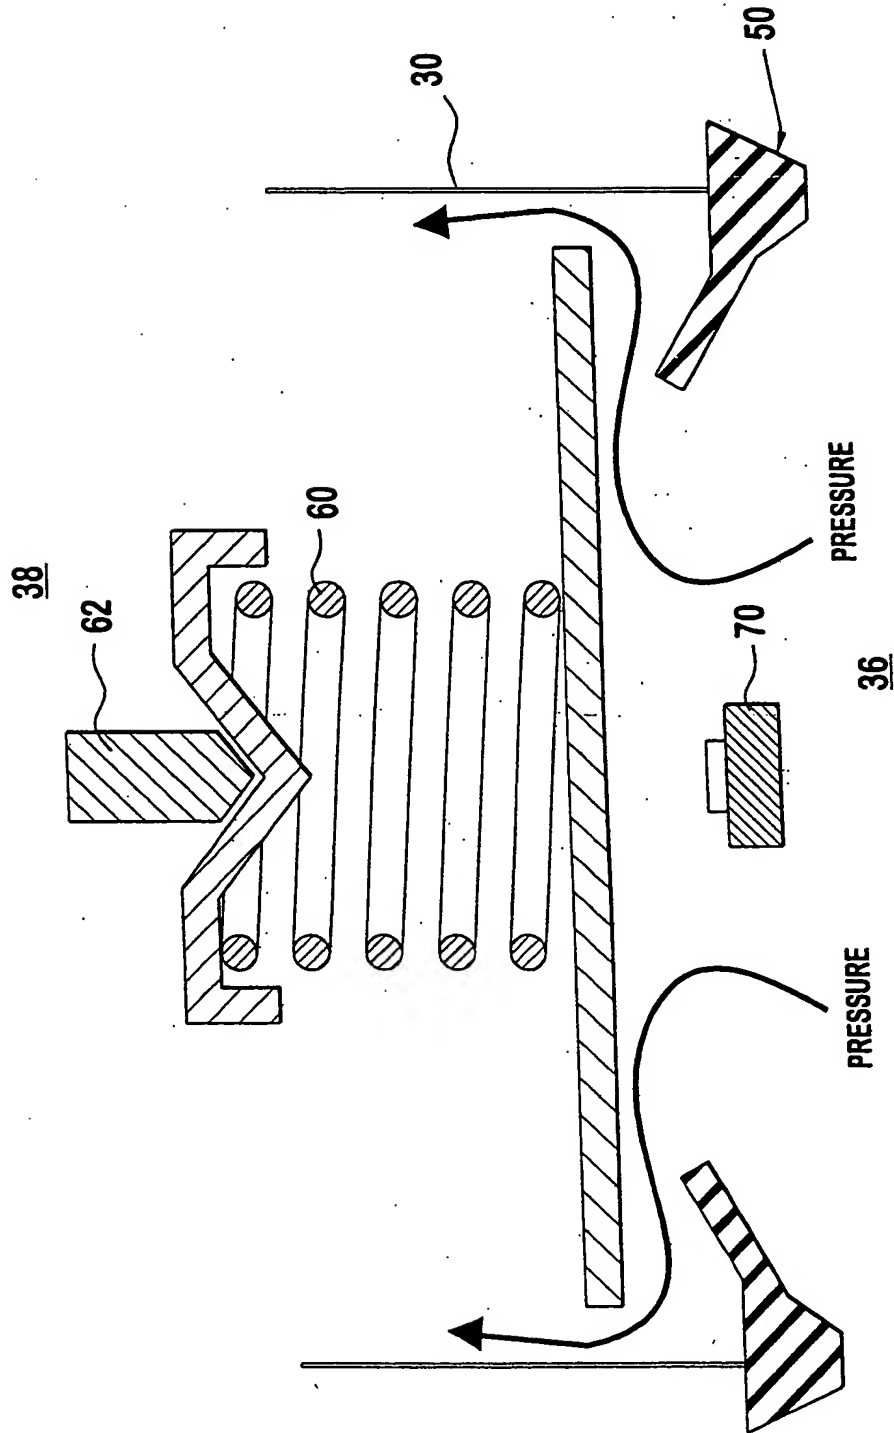


FIG. 3C

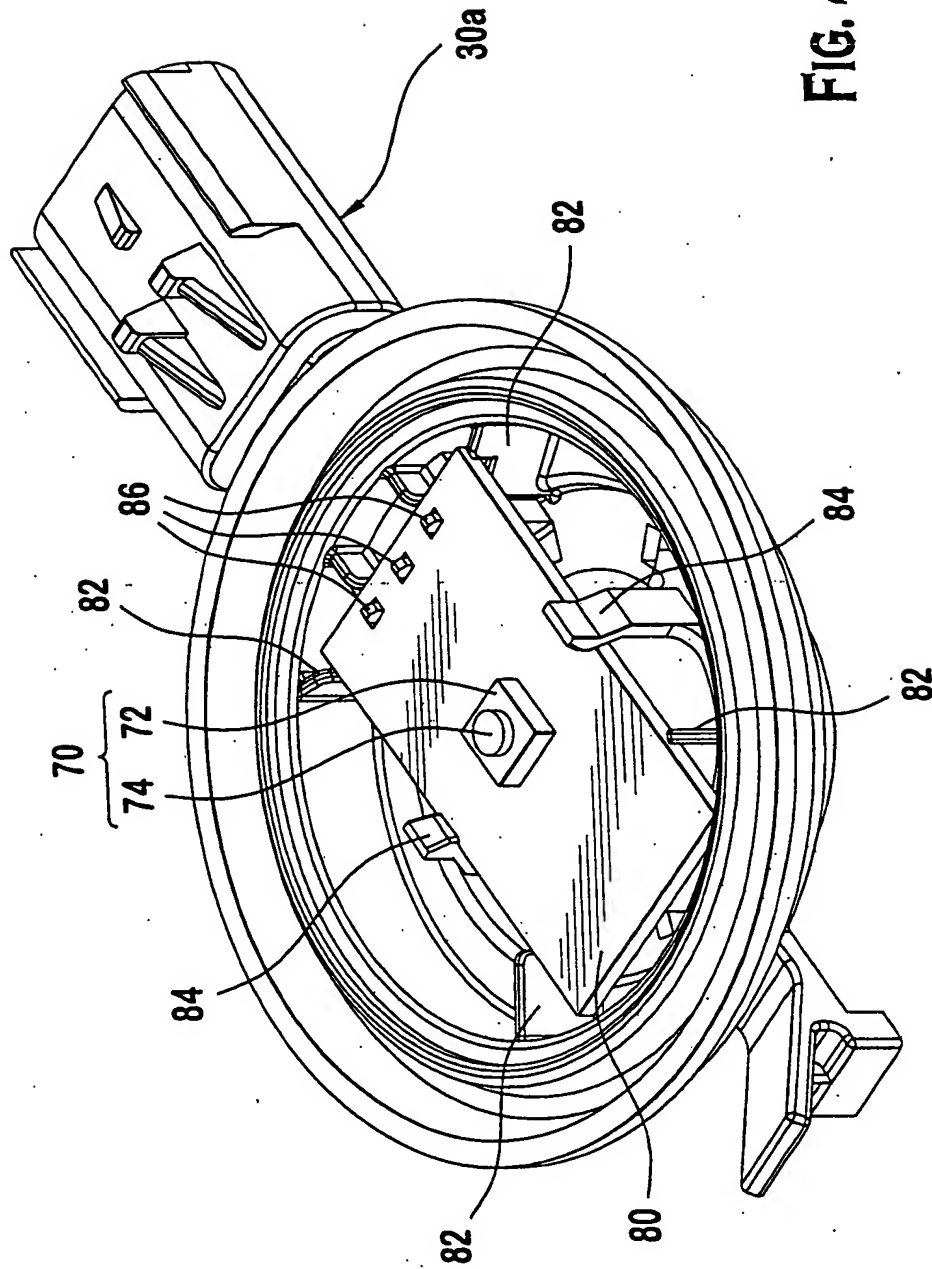


FIG. 4

FIG. 5A


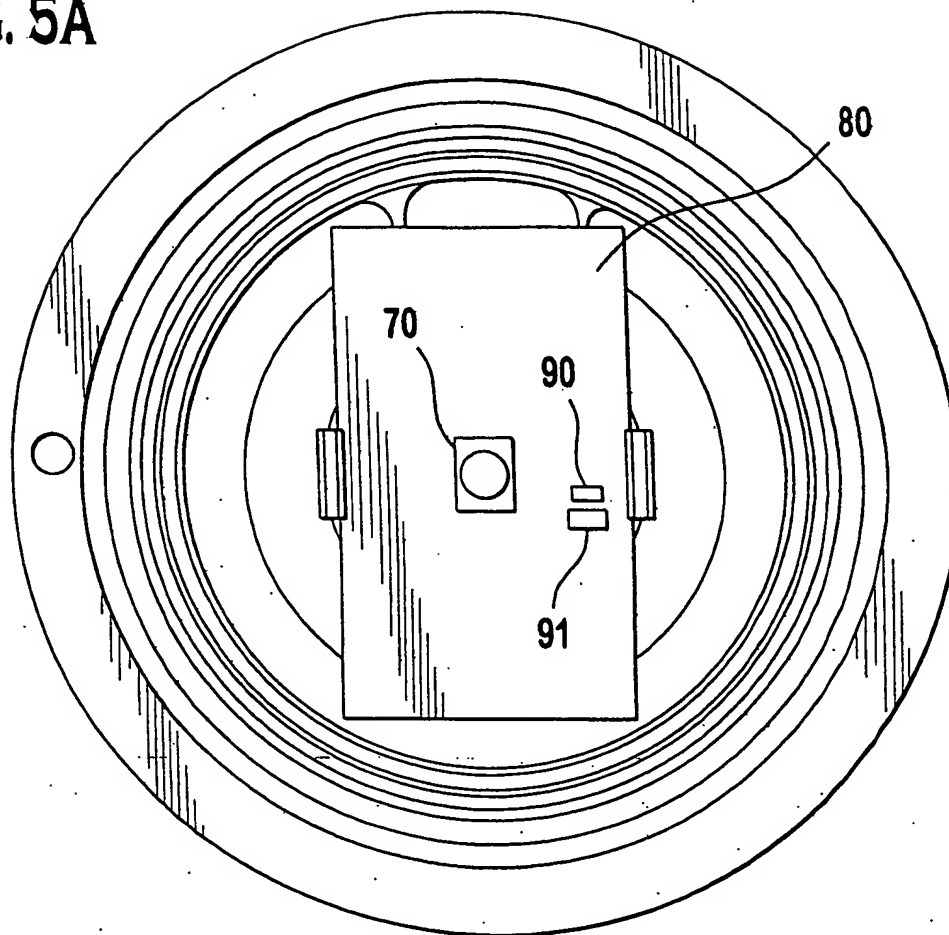


FIG. 5B

STEP CHANGE IN FLOW: 0-80 SLPM
 AMBIENT TEMPERATURE: 20 DEGREES C
 HEATING RESISTOR: 100% PWM

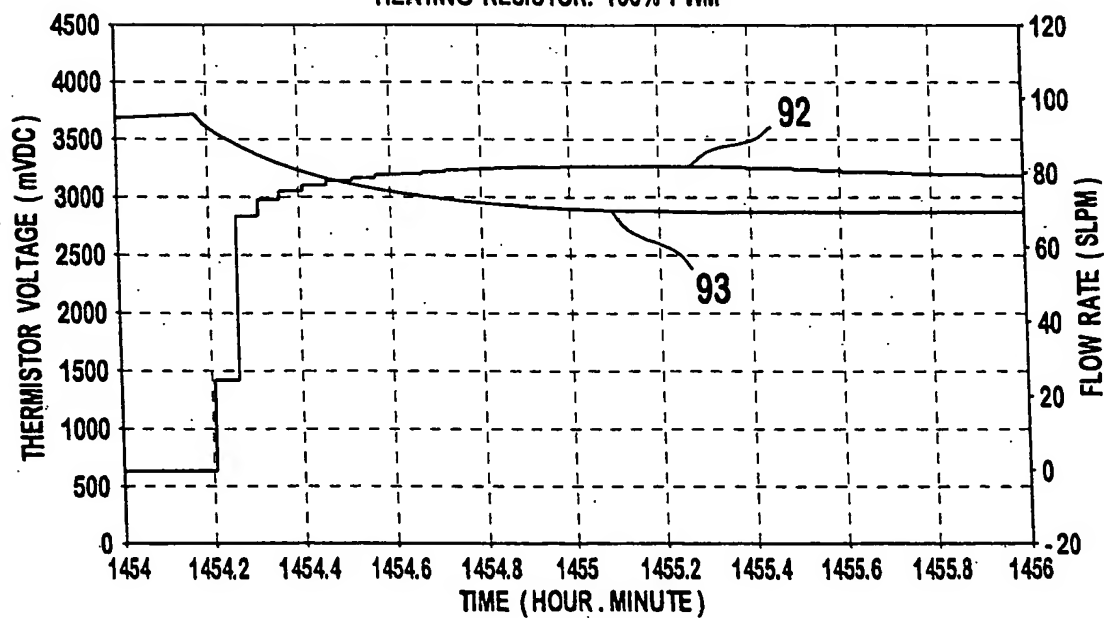

not receive the follow
 ing PG 10 of 10